


  
WOODLAND W. HOLM

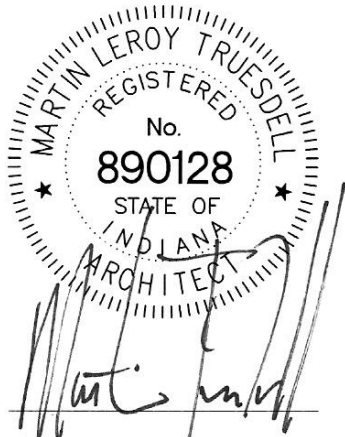

MARTIN L. TRUESDELL

## PROJECT

Northeastern Wayne School Corporation  
Early Childhood Center

Addendum #2

The contents of, and the attachments to this Addendum shall be incorporated into the Contract Documents as specified in the General Conditions of the Contract (A201), 1.1.1.

Engineers / Architects:

**Stair Associates, Inc.**  
**9641 Commerce Dr.**  
**Carmel, IN 46032**

**Office: 317-228-1900**  
**Fax: 317-228-1700**

Date: 12/12/2019

File #1344

## Addendum #1

To: All Bidders of Record

This addendum forms a part of and modifies the Bidding Requirements, Contract Forms, Contract Conditions, the Specifications and Drawings. This addendum is issued in accordance with the provision of "The General Conditions of the Contract for Construction, "Article 1, "Contract Documents" and becomes a part of the Contract Documents as provided therein. All Contractors shall incorporate into the contract documents and into their bid the following changes and clarifications to the drawings, specifications and scope of work.

Acknowledge receipt of this addendum in the location provided on the bid form.

### SPECIFICATIONS:

1. Specifications Section 08 71 00 – Door Hardware. Add hardware for door opening DM2

| <u>QTY</u> |    | <u>DESCRIPTION</u>        | <u>CATALOG NUMBER</u> | <u>FINISH</u> | <u>MFR</u> |
|------------|----|---------------------------|-----------------------|---------------|------------|
| 2          | EA | CONT. HINGE               | 224XY                 | 628           | IVE        |
| 1          | EA | STOREROOM LOCK            | L9080J 17A            | 626           | SCH        |
| 1          | EA | MANUAL FLUSH BOLTS        |                       | 626           | IVE        |
| 1          | EA | FSIC CORE                 | 23-030 EV29 T         | 626           | SCH        |
| 1          | EA | RAIN DRIP                 | 142AA                 | AA            | ZER        |
| 2          | EA | WEATHERSTRIPPING          | 429AA-S               | AA            | ZER        |
| 2          | EA | DOOR SWEEP, BRUSH W/ DRIP | 8198AA                | AA            | ZER        |
| 1          | EA | THRESHOLD, 1/2"           | 655A                  | A             | ZER        |

### DRAWINGS:

1. Sheet C101: Add note: Existing Cistern is 12' deep.
2. Sheet A103: Add note: Door Opening DM2. Cut opening in existing exterior synthetic stucco and backing material to create new door opening. Frame opening with treated dimension lumber and provide necessary blocking for installation of hollow metal frame. Carefully install frame to provide finished appearance in synthetic stucco, including but not limited to installing sealant to provide a complete and water tight condition.